

SPECIFICATIONS

Model	D32AM	
Panel	Screen Size (diagonal)	32"
	Active Display Area (inch mm)	27.5 x 15.47 698.4 x 392
	Resolution	1920 x 1080
	Aspect Ratio	16:9
	Display Colors	16.7 M
	Brightness (cd/m ² ; typ.)	350
	Contrast Ratio	3000:1
	Response Time (ms; GTG)	6
	Viewing Angle	178°/178°
	Lifetime (hours)	50,000
	Backlight type	LED
Resolution	Monitor	1920 x 1080
	DTV	1080p
Input	1 x DP(Optional) 2 x HDMI 1 x DVI 1 x VGA(D-Sub) 1x IR 1x RS232C	
Output	1x DVI 1x IR 1x RS232C Audio Line Out Speaker (Ready)	
Power	Input Voltage	100 – 240V AC
	Power consumption	60 W
Features	PIR Sensor (Motion detection)	Option
	Auto Power Control(DPMS)	Yes
Operation	Temperature (°C)	0 - 40
	Humidity (%)	20 - 80
	OSD Language	10 Lang
Dimension	Set (W x H x D) , in mm 29.3 x 17.17 x 1.71 744.1 x 438.6 x 43.5	
Bezel Size (U/D/L/R), in mm		0.83 / 0.83 / 0.83 / 0.83 21.05 / 21.05 / 21.05 / 21.05
Wall Mounting (WxH) mm		300 x 300 (M6)
Weight	Set (lb kg) 24.25 11	

FEATURES
LED Backlight

HYUNDAI's public displays with LED backlight bring the advantage of up to 40% lower power consumption, compared to displays with CCFL backlight.

Easy operating OSD menu, Remote control


In order to setup a multi display wall, the single units are linked by a daisy chain connection over DVI interface. The configuration of each display can be easily set-up over the on-screen menu or the RS232C interface.

Slim Design

These products enable the slim design.

DIMENSIONS

[Unit: mm[inch]]

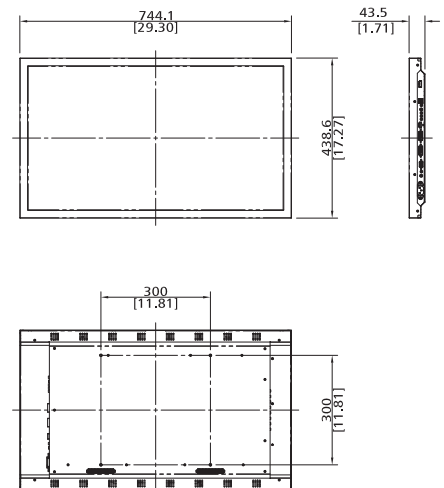

Specifications and design are subject to change without notice. See our website for detailed information.

UPDATE : MAY. 2015