

SPECIFICATIONS

Model		D467MB
Panel	Screen Size (diagonal)	46"
	Active Display Area (inch mm)	40.08 x 22.55 1018.08 x 572.67
	Resolution	1920 x 1080
	Aspect Ratio	16:9
	Display Colors	16.7M
	Brightness (cd/m ² ; typ.)	2500
	Contrast Ratio	5000:1
	Response Time (ms; GTG)	6
	Viewing Angle	178°/178°
	Lifetime (hours)	50,000
Backlight type	LED	
Resolution	Monitor	1920 x 1080
	DTV	1080p
Input		DP(Optional) HDMI DVI VGA(D-Sub) Component(BNC) Video/Audio Composite(BNC) Video / Audio PC Audio RS232C IR RJ45(Optional)
Output		DVI Component(BNC) Video / Audio Composite(BNC) Video / Audio RS232C IR Audio Line Out Speaker (ready) RJ45(Optional)
Power	Input Voltage	100 – 240V AC
	Power consumption	310 W
Features	Auto Cooling System	Yes
	Auto Power Control (DPMS)	Yes
	Tempered Glass	No
	Anti Reflection Coating	No
	Touch Screen	No
Auto Brightness Sensor	Yes	
Operation	Temperature (°C)	0 - 40
	Humidity (%)	20 - 80
	OSD Language	10 Lang
Dimension	Set (W x H x D), inch/mm	40.98 x 23.47 x 4.33 1038.5 x 595.9 x 110
Bezel Size (U/D/L/R), inch mm		0.439 / 0.439 / 0.382 / 0.382 11.15 / 11.15 / 9.71 / 9.71
Wall Mounting (WxH), mm		400 x 400 (M6)
Weight	Set (lb kg)	60.63 27.5

FEATURES

Special Out-Of-Home LCD Panel



By using commercial grade LCD panels for Out-Of-Home applications, the HYUNDAI Digital Signage display can provide a higher brightness and contrast than standard LCD TV panels. Our LCD panel enables to operate for longer working time, deliver clear and bright image contents in the portrait or landscape format without any loss of quality.

High Brightness & Contrast

Achieving a brightness up to 2,500 cd/m² and working with a smart dynamic contrast technology, the special Out-Of-Home panels ensure bright and sharp pictures with a facsimile depth, even in bright enlightened environments.

DIMENSIONS

[UNIT : mm[inch]]

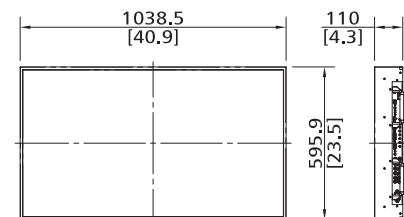

Specifications and design are subject to change without notice. See our website for detailed information.

UPDATE : JULY, 2015

HEAD OFFICE - HYUNDAI IT CO., LTD.

S-20 Garden5 Tool 8F, Chungmin-ro, Songpa-gu, Seoul, 138-962 Korea
Tel. +82 70 7008 0110 E-mail: prio123@hyundaiit.com
www.hdit.co.kr

HYUNDAI IT AMERICA CORP.

2051 Junction AVE., Suite 112 San Jose, CA 95131, USA
Tel. +1 408 954 8920 email : sales@hyundaiita.com
www.hyundaiit.com

HYUNDAI IT EUROPE GMBH

Borsig Str. 11-13
65205 Wiesbaden, Germany
Tel. +49(0) 6122-70342-10 email : info@hyundaiit.eu
www.hyundaiit.eu

HYUNDAI IT JAPAN

Kawaziri Bldg. 2F, 534 Waseda Tsurumakicho, Shinjuku-ku, Tokyo, Japan
Tel. +81 3 6273 9652 email : sales@hyundaiit.co.jp